

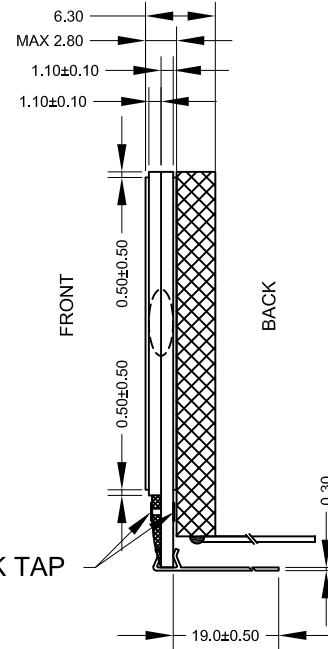


Revised Record


1.0

New issue

2012-12-14

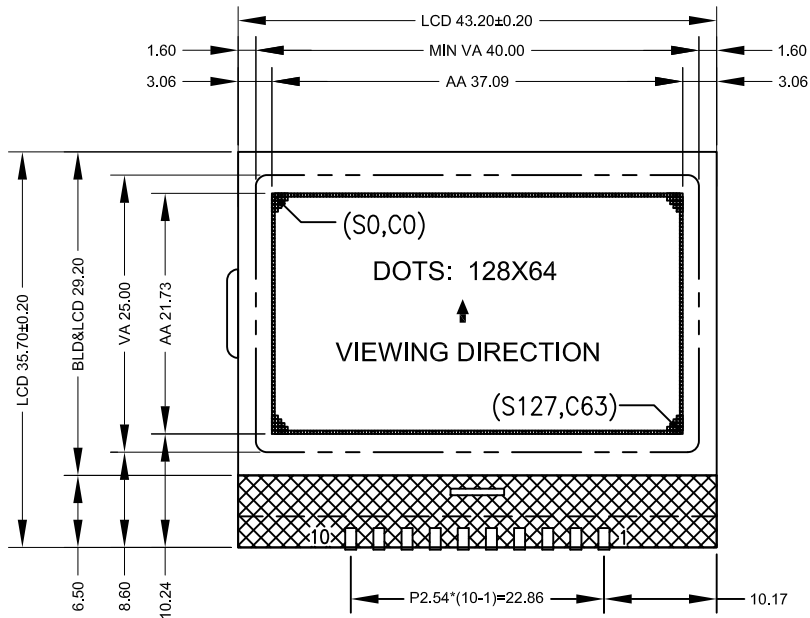



COM & SEG LAYOUT



SCALE: 20:1

INTERFACE

1	/CS
2	/RST
3	A0
4	SCLK
5	SID
6	VDD
7	VSS
8	V0
9	XV0
10	VG

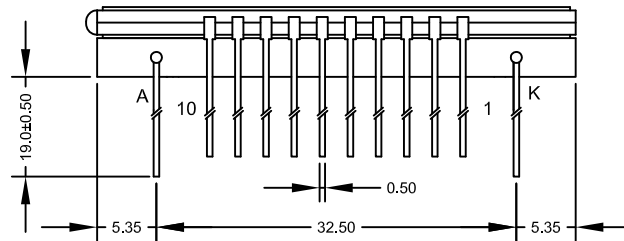

BACKLIGHT CIRCUIT

NOTES:

- 01. DISPLAY TYPE: FSTN/POSITIVE/TRANSFLECTIVE RoHS
- 02. OPERATING VOLTAGE: VDD=3.0V,VOP=9.0V
- 03. OPERATING TEMPERATURE: -20°C~+70°C
- 04. STORAGE TEMPERATURE: -30°C~+80°C
- 05. DRIVE MODE: 1/64DUTY,1/9BIAS
- 06. VIEWING DIRECTION: 12:00
- 07. DRIVE IC: ST7567
- 08. CONNECTOR: COG+PIN
- 09. BACKLIGHT: 2PCS_LED_WHITE,IF=45MA&VF=3.0±0.1V
- 10. CUSTOMER'S PART ID:


BLAZE Blaze Display Technology Co.,Ltd.

DESIGNED BY: BDT-25

BGG12864-05

VERSION: 1.0

CHECKED BY: BDT-04



PAGE 1 OF 1

APPROVED BY: BDT-02

UNIT: mm

Website: <http://www.blazedisplay.com>

DATE: 2012-12-14